specifications



BB780-4SL

Backbar, 4 Door (Glass, Sliding), Integral Fridge

Sliding Doors

CABINET DIMENSIONS

 External
 Internal


 Height
 920mm*
 758mm


 Width
 2620mm
 2140mm

 Depth
 596mm
 530mm

Floor area 1.54m²
Gross volume 780L

Electronic Controller

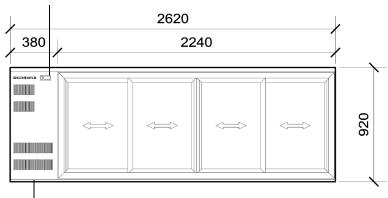



Side Mounted Integral Refrigeration Unit

CABINET SPECIFICATIONS

Doors Self-closing, double glazed toughened single Low-E safety glass sliding doors

Internal door opening size 4 door openings: 720mm high x 470mm wide

Shelves Two adjustable shelves per door: 495/555mm wide x 440mm deep

Weight 229 kg

Worktop (optional) Optional 25mm stainless steel worktop

Electrical safety climate class 5

Internal lighting 1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched

Electrical 230-240 Volts a.c. 50 Hz, 4.0 Amps

Temperature range +1°C to +4°C

GEMS class M1

GEMS energy consumption 11.55 kWh/24h

GEMS annual running cost \$1,266 p.a. (@ \$0.30/kWh)

Refrigeration system Electronic controlled, side mounted, integral refrigeration unit

Refrigerant R134a / 425g **Nominal capacity** 825 Watts

Insulation 50mm thick, high density cyclo-isopentane polyurethane foam


Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2008 SKOPE Industries Limited

PSS0153 Rev. 2.1 Mar. 2021







Email: skope@skope.com Website: www.skope.com



^{*} Height excludes castors, legs or optional worktop.