

MSB225N | Zanotti SB Range Drop-In Refrigerated Chiller Systems

Refrigeration Systems

MSB225N

ZANOTTI SB RANGE DROP-IN REFRIGERATED CHILLER SYSTEMS



Advanced Digital Controller



Internal light included




Drainage may be required in extreme ambient conditions or when storing high-water content produce





MSB225N | Zanotti SB Range Drop-In Refrigerated Chiller Systems

Refrigeration Systems

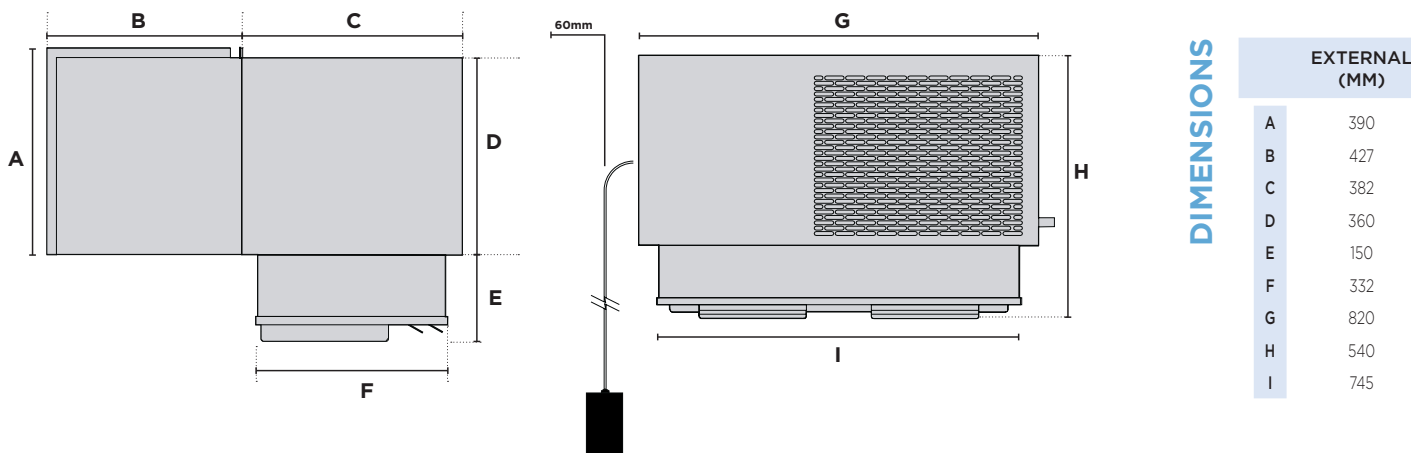

Mounting Scheme

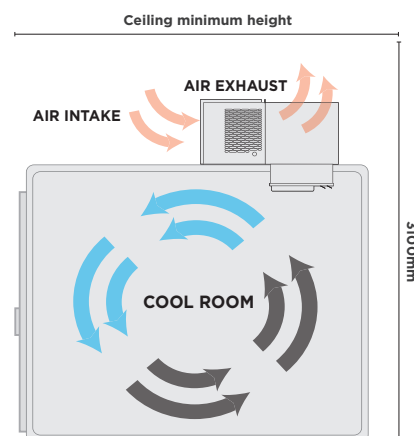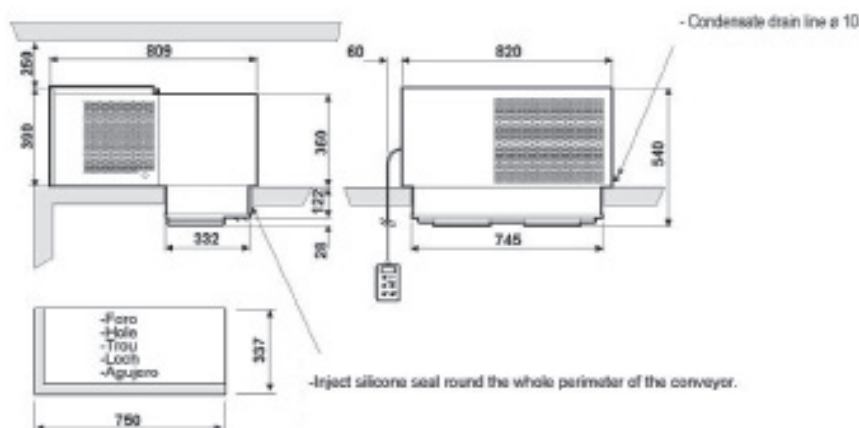

Dropping in from above with minimal protrusion into the room, this system requires vertical clearance for adequate air flow

SPECIFICATIONS	Part Number	3835103
	Refrigeration Capacity	2406W
	Temp. Range (°C)	-5 to +10°C
	Max. Ambient Temp. (°C)	45°C
	Run/Full-Load (Amps)	6.3/12.0A
	Temp. Display	Digital
	Gross Weight (kg)	74kg
	Refrigerant	R404a
	Power Supply	15A
	Defrost Type	Hot Gas
	Type of Control	Electronic
	Internal Light	Pre-Wired
	Heated Door Trim	No
	Drainage Required	No
	Warranty	1 Year, Parts only
	Warranty Service	Bromic Extra Care

* Medium temp rated at 5°C internal temperature and 30°C ambient temperature.

POWER DATA	Tc °C	Ta °C	P watt	P Kcal/h	V100 m³	V80 m³	V60 m³
		20	3080	2649	32	29	27
		25	2915	2507	29	26	24
	10	30	2748	2363	27	25	22
		35	2578	2217	24	22	20
		40	2409	2072	21	19	17
		45	2240	1926	19	17	16
		20	2722	2341	26	24	22
		25	2565	2206	24	22	20
	5	30	2406	2069	21	19	17
		35	2246	1932	19	17	16
		40	2085	1793	17	15	14
		45	1926	1656	15	14	12
		20	2337	2010	20	18	17
		25	2179	1874	18	16	15
	0	30	2023	1740	17	15	14
		35	1868	1606	15	14	12
		40	1714	1474	13	12	11
		45	1560	1342	11	10	9.1
		20	2033	1748	17	15	14
		25	1884	1620	15	14	12
	-5	30	1737	1494	13	12	11
		35	1594	1371	11	10	9.1
		40	1454	1250	9.7	8.8	8.1
		45	1320	1135	8.1	7.4	6.7