



HOSHIZAKI ICE MACHINES


KMA Series Ice Machine

Product Features

- Up to 72kg of ice per day
- Individual premium crescent cube with no ice bridging
- Exceptionally hard crystal clear cubes that melt slowly
- Durable stainless steel exterior
- Slide in air filter at front for easy cleaning - maintaining performance efficiency
- Patented Double-sided Stainless Steel Evaporator for all water conditions - produces more ice in less cycles
- Flush mount to rear wall
- Vertical pump motor - no mechanical seals
- Domed float switch - good in hard water areas
- Snap in water tank design - easy to remove for sanitization
- Low electrical consumption
- Low water consumption
- Audible alarms
- Rated for tropical conditions 43°C ambient temperature
- 2 year Parts & Labour on entire unit



CRESCENT ICE

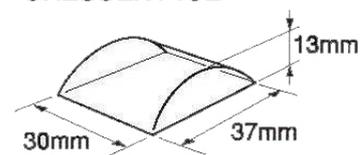

Simply the world's best ice™





Range

- KM-30A
- KM-50A
- KM-75A

Product Specifications

Model	Dimensions (W x D x H)	Cooling	Weight	AC Supply Voltage	Refrigerant	Ambient	Water Temp	Water Pressure	Water and Drain Connections
KM-30A	450 x 610 x 840mm	Air	Net: 39kg Packed: 49kg	220-240V/ 50Hz 10Amps	R134A	1 – 40°C	5 – 35°C	70 – 800kPa	Water: 3/4" Drain: 1 BSP
KM-50A	603 x 610 x 840mm		Net: 46kg Packed: 58kg						
KM-75A	603 x 712 x 840mm		Net: 51kg Packed: 64kg						

Ask Hoshizaki representative for additional information if required

Ice Production Specifications

Model	Ice Production per 24 hours (Air / Water)			Ice Production per cycle	Freeze Cycle	Cube Size (mm)	Max Storage
	10°C/10°C	21°C/15°C	32°C/21°C				
KM-30A	36kg	32kg	25kg	0.71kg/80pcs	30mins	Crescent	16kg
KM-50A	52kg	50kg	41kg	0.95kg/110pcs	25mins	Crescent	23kg
KM-75A	72kg	70kg	55kg	1.25kg/130pcs	24mins	Crescent	40kg

Please Note: above are approximate




KMA Series Ice Machine




HOSHIZAKI
ICE MACHINES

KM-30A

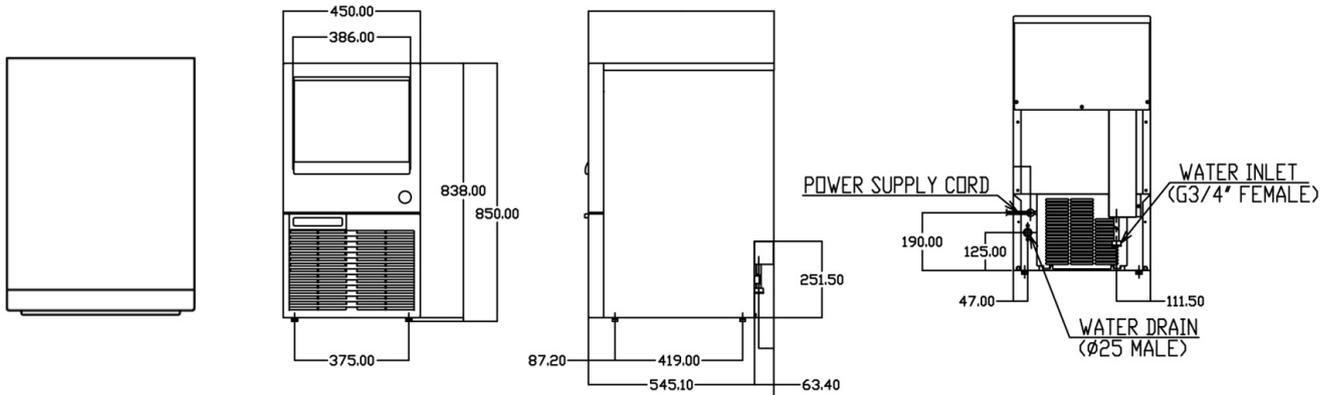

KM-50A

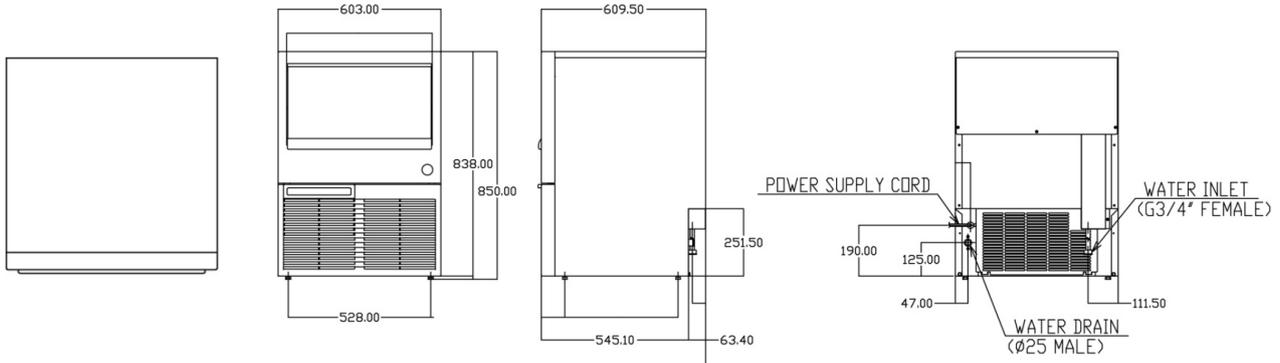

KM-75A

