

TECHNICAL SPECIFICATION SHEET FOR

Icematic Modular Ice Maker

MC202F - Full Dice W 23mm x D 23mm x H 26mm, 10g

MC202H - Half Dice W 11mm x D 23mm x H 26mm, 6g




- Full dice (F model) or half dice (H model) sized ice cube machine head only
- **220kg** daily production rate
- **234** full dice ice cubes per cycle
- **468** half dice ice cubes per cycle
- Air cooling condensing unit
- Vertical evaporator with circulation pump
- Front baffle with magnetic switch that stops the machine when bin is full
- Electronic control panel with LED showing proper functioning or warning indicators
- Stainless steel external body
- Requires storage bin model SB205, SB255, SB305*, SB405*, SB505*, SB500
- Moffat IM101000 single stage triple action filtration system, including head and brass fittings

* Cover kits required to suit with storage bins as follow: KM 305 for SB305, KFM 405 for SB405

Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

TECHNICAL SPECIFICATION SHEET FOR

Icematic Modular Ice Maker MC202F | MC202H

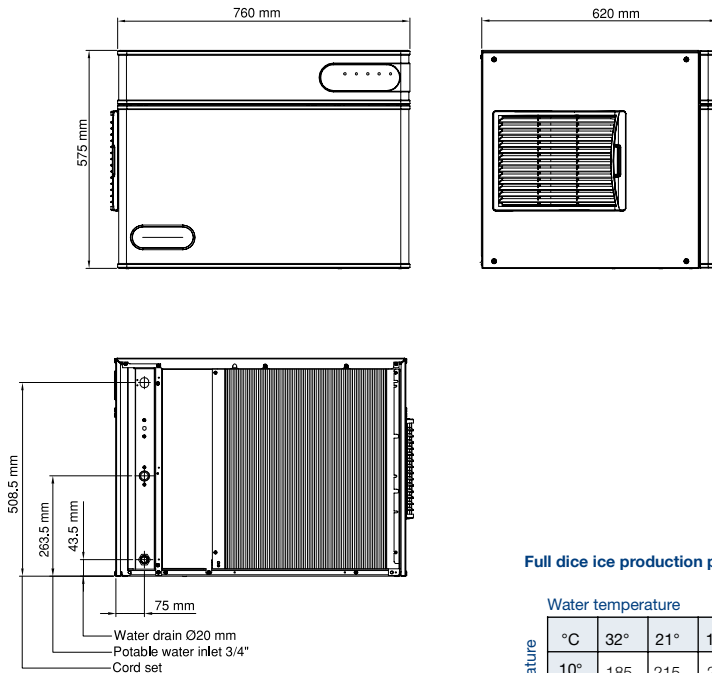

Full dice ice production per 24 hours

Water temperature						
Ambient temperature	°C	32°	21°	15°	10°	
	10°	185	215	230	240	kg
	21°	175	200	215	220	kg
	32°	135	155	160	165	kg
	38°	120	133	138	140	kg


MC202F | MC202H

Dimensions

Width: 760mm
Height: 575mm
Depth: 620mm
Nett weight: 70kg
Packed weight: 85kg

Ice cube production dimension

Full dice: W 23mm x D 23mm x H 26mm, 10g
Half dice: W 11mm x D 23mm x H 26mm, 6g



Water consumption

Air cooled condensing unit: 12 litres per hour

Electrical rating

220-240V, 1P+N+E, 50Hz, 1000W,
15A cordset fitted

Refrigerant type

R404a

Installation distance from wall

- rear 150mm
- right 150mm
- left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R ¾"
Cold water (5-35°C)
Pressure (1-5 bar)
Water outlet connection: Ø 20mm



moftat.com.au
moftat.co.nz

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au
South Australia
Telephone 03-9518 3888
vsales@moffat.com.au
Queensland
Telephone 07-3630 8600
qldsals@moffat.com.au
Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
16 Osborne Street
Christchurch 8011
Telephone 03-389 1007
Facsimile 03-389 1276
sales@moffat.co.nz
Auckland
Telephone 09-574 3150
sales@moffat.co.nz

Disclaimer:
All unit capacities are based on subjective testing. Moffat accepts no liability for production values.



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Moffat 06.13

