

COMBI STEAMER

OPVET201



20 x 1/1 GN

Item



LCD 7" Touch Screen

TOUCH INTERFACE.

Just a simple touch on the desired recipe icon, and Leo adjusts for cooking with unbeatable results.

Thanks to the new 7" HD colour capacitive display, it is possible to configure the start screen based on your own needs, bringing the most commonly used recipes forward.



MULTILEVEL



ECOSPEED



JUST IN TIME



GFT
(only for gas models)



CLIMA



LM CLEANING SYSTEM
COMBI CLEAN
CALFREE (*)



FAST-DRY



ECOVAPOR



TURBOVAPOR

COOKING MODES

- AC (Automatic Cooking) system for International recipes complete with pictures illustrating the finished meal.
- Manual cooking with three cooking modes: Convection from 30°C to 300°C, Steam from 30°C to 130°C, Combination Convection + Steam from 30°C to 300°C.
- Programmable modes - Possibility to program and save cooking methods in an automatic sequence (up to 15 cycles) giving each program its own name, picture and information on the recipe.
- CLIMA® automatic system for measuring and controlling the humidity in the cooking chamber.
- FAST-DRY® system for quick dehumidification of the cooking chamber.

OPERATION

- DISPLAY that can be configured based on the needs of the user, bringing forward the programs used most.
- Automatic "one touch" cooking (AC).
- Organization of recipes in folders with preview, giving each folder its own name.
- Intelligent recognition of recipes in multilevel folders.
- 7" colour screen (LCD - TFT) that is high definition and capacitive with "Touch Screen" functions.
- SCROLLER PLUS knob with Scroll and Push function for confirming choices.

(*) only for models with boiler

CONTROL EQUIPMENT

- Autoreverse (automatic reverse of fan rotation) for perfect cooking uniformity.
- Automatic parallel compartment and core temperature control, DELTA T system.
- Automatically regulated steam condensation.
- Programmable deferred cooking.
- Ability to choose up to 6 fan speeds; the first 3 speeds automatically activate the reduction in heating power.
- For special cooking methods, you can use an intermittent speed.
- Temperature control at the product core using probe with 4 detection points.
- 2 core probe.
- Core probe connection through a connector outside of the cooking chamber, with the ability to quickly connect the needle probe for vacuum cooking and small pieces.
- USB connection to download HACCP data, update software and load/unload cooking programs.
- Ready for SN energy optimization system (Optional).
- SERVICE program for: Inspecting the operation of the electronic board and display of the temperature probes - Appliance operation timer for all primary functions for programmed maintenance.
- **ECOSPEED** - Based on the quantity and type of product, the optimizes and controls the delivery of energy, maintains the correct cooking temperature, preventing any fluctuations (-10% energy / -30% water / -5% weight loss *).
- **ECOVAPOR** - With ECOVAPOR system there is a definite reduction in water and energy consumption due to the automatic controls of the steam saturation in the cooking chamber (-10% energy / -30% water / -10% steam *).

CLEANING AND MAINTENANCE

- Self-diagnosis before starting to use the equipment, with descriptive and audible signalling of any anomalies.
- LM automatic cleaning system, with separate container and automatic dispensing. CombiClean liquid cleanser. Supplied with 1 cleanser tank DL010, 10 l.
- Manual cleaning with external hand shower (optional).

CONSTRUCTION

- IPX5 protection against sprays of water.
- Perfectly smooth, watertight chamber.
- Door with double tempered glass with air chamber and interior heat-reflecting glass for less heat radiation towards the operator and greater efficiency.
- Internal glass that folds to open for easy cleaning.
- Door with 3 locking points.
- Adjustable hinge for optimal seal.
- Deflector that can be opened for easy fan compartment cleaning.

ELECTRIC HEATING SYSTEM

- Cooking compartment heating elements of armoured INCOLOY 800 type.

SAFETY FEATURES

- Cooking compartment safety thermostat.
- Cooking compartment safety device for pressure built-up and depression.
- Fan motor thermic protection.
- Magnetic door switch.
- Lack of water displayed alarm.
- Self-diagnosis and fault display.
- Component cooling system with overheat display control.

STANDARD EQUIPMENT

- LM automatic cleaning system. Supplied with 1 cleanser tank DL010, 10 l.
- Trolley
- Multipoint core probe (Ø 3 mm).
- 2 stainless steel grids 1/1 GN.

OPTIONAL - TO BE REQUESTED WHEN ORDERING OVEN

- Configuration for connection to extraction hood.
- Extra charge for energy saving system connection (SN).
- Extra charge for pastry version trolley 600 x 400.

ACCESSORIES

- Multipoint core probe for large items. Pin length 180 mm. Ø 3 mm.
- Needle core probe - Ø 1 mm.
- Multiprobes system - 2 multipoint core probes - ø 3 mm.
- Fat filter.
- Hand shower.
- Flanged feet kit for marine installations.
- Trolley with drip tray.
- Pastry version - Trolley with drip tray 600 x 400.
- Plated meals trolley with drip tray.
- Trolley thermal cover.
- Extraction hood with air-cooled condenser (available only for prearranged ovens).
- Floor models regeneration and holding systems.
- Marine version kit (flanged feet, door immobilizing lock, full aisi 304).

OPVET201

TECHNICAL DATA



Chamber capacity	GN	20 x 1/1	Total electric power	kW	31,8
Distance between layers	mm	63	Gas versions nominal heating output	kW / kcal	- / -
Number of meals		150 / 300	Chamber heating output	kW / kcal	30 / -
External dimensions	mm	960 x 825 x 1810 h	Steam heating output	kW / kcal	- / -
Dimensions with packing	mm	1130 x 1050 x 2060 h	Fan power	kW	1,8
Weight - Net / Gross	kg	260 / 370	Power supply voltage	V - 50 Hz	3N AC 400

Special voltages and frequencies upon request

OPVET201

(mm)

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice

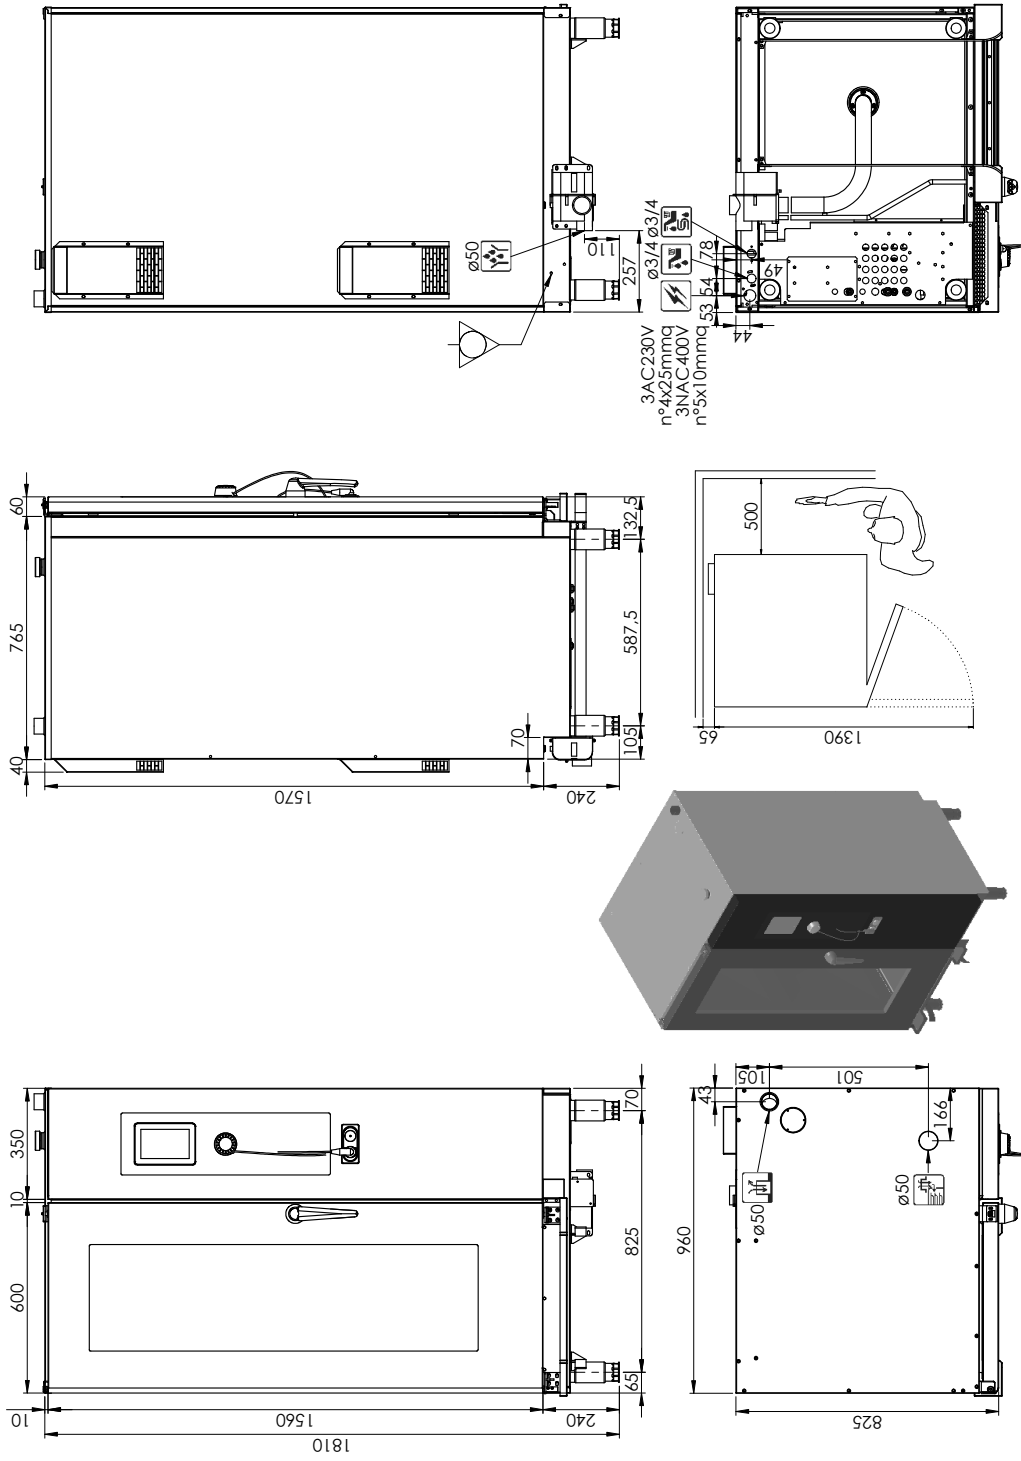

According to CE rules, gas ovens must be installed where proper evacuation of burnt gas can be provided (type B13, B23, A3)

CE IPX 5