

## 900 mm Refrigerated Food Display

**Series:** ActiveView  
**SKOPE ID:** FogRoo  
**Dimensions:** 900 mm (W) × 750 mm (D) × 1300 mm (H)  
**Capacity:** 358 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A premium 900 mm wide refrigerated food display merchandiser designed for hospitality spaces requiring high-impact presentation and temperature control, such as cafés, petrol and convenience, and retail. The fridge is engineered and certified to safely store food from 1°C to 4°C. Temperatures are also adjustable via the SKOPE-connect smartphone app, including a dedicated setting for controlled ambient (15°C to 18°C). The frameless double-glazed glass display is heated to minimise condensation and maximise product visibility. The fridge is supplied with glass shelves on low-profile stainless steel arms as standard, with stainless steel wire shelves as an optional accessory. The shelving is height-adjustable and can be tilted with upstands and ticket holders on the front edge. Each shelf is fitted with LED light strips to highlight the food on display while additional full-height lighting ensures optimum visibility. All lighting can also be dimmed and set to automatically turn on or off to save energy. Access to the fridge is via two fully removable double-glazed sliding doors that stay open over 75 mm, and auto-soft-close at 75 mm and less. At 1300 mm height on castors, the cabinet has a convenient serve-over height. The removable side and front base panels support seamless integration into shopfitting designs. Constructed with an energy-efficient, rear-breathing R290 removable refrigeration cartridge, allowing the unit to be fully enclosed on the front and sides, the fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



ActiveCore Technology




Natural Refrigerant



GEMS



SKOPE-connect

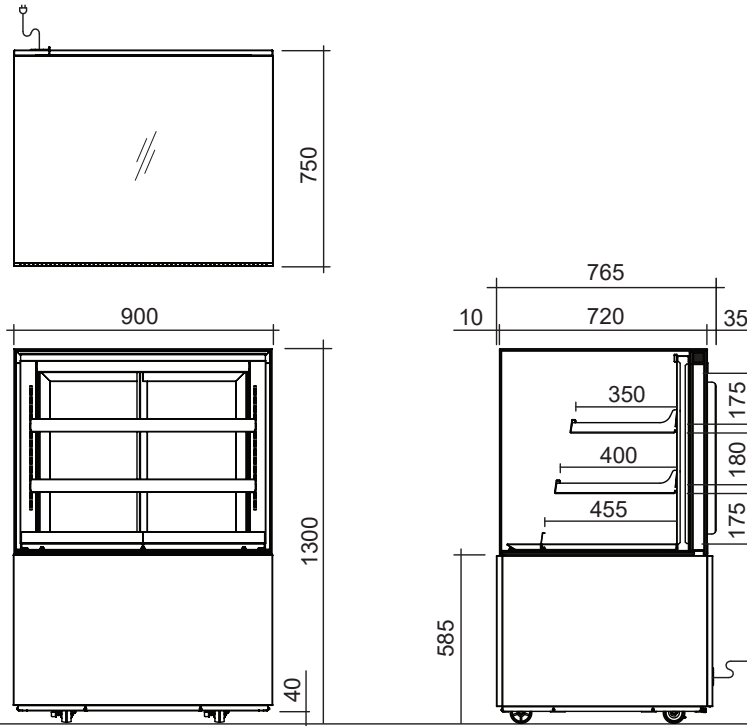

### Cabinet

<b>Type</b>	Refrigerated		
<b>Finish</b>	304 AISI stainless steel and black, screen-printed glass		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	40	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Doors</b>	Type	Glass sliding door (double-glazed, argon-filled, low-e, internal side mirrored)	
	Opening Size	Height (mm)	590
		Width (mm)	725
<b>Shelving</b>	1 × adjustable height top shelf (775W × 350D), 1 × adjustable height middle shelf (775W × 400D), 1 × solid bottom shelf (860W × 450D)		
<b>Lighting*</b>	Interior	1 × 700 mm 9.9 W top light, and 2 × 580 mm 8.2 W side lights	
	Shelving	2 × 700 mm 9.9 W undershelf lights	

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	900	860	960
<b>Depth (mm)</b>	750	635	790
<b>Height (mm)</b>	1300 (castors)		
	1295 to 1380 (legs)	655	1600
	1260 (plinth mount)		
<b>Weight (kg)</b>	181		223
<b>ANSI Volume (L)</b>	358		
<b>Footprint (m<sup>2</sup>)</b>	0.68		

### Ventilation (mm)

Top	Sides	Rear
Not required	Not required	500

### Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

### Performance

<b>Product Temperature Range (°C)*</b>	1 to 4
<b>Maximum Ambient Temperature (°C)</b>	32
<b>Sound Power Level (dB(A))</b>	54.3

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	9
<b>Product Temperature Class</b>	M1
<b>Total Energy Consumption</b>	3.30 kWh/24 h
<b>Annual Running Costs</b>	\$361 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220 to 240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2.8 m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	7.0

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	26.5		
<b>Refrigerant/Charge</b>	R290/111 g		
<b>Nominal Capacity (W)</b>	547		
<b>Heat Rejection (W)</b>	Average 140	Peak 170	
<b>Defrost Type</b>	Automatic, off-cycle		
<b>Drainage</b>	No plumbing required		

\* Controllable via SCS Connect.



FDR.900  
on the SKOPE website