

SPG415MAU

EASYLINE FULLY INSULATED UNDERBENCH GLASSWASHER - 15 AMP

400x400 mm basket



GUARANTEED WASH PERFORMANCE

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have a rinse pump on board, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production.

PRODUCT FEATURES

- Double skin construction in AISI 304 stainless steel
- Moulded wash tank, rack guides and door
- Counterbalanced door with spring assisted hinges, full surround door gasket and no supporting rods
- HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump
- 2.3 litres water rinse cycle
- Over 30% water exchange every cycle
- Drain pump with triple stage dynamic filtration system
- Door opening height: 300mm
- Electronic controls with 4 wash programs
- Shortest wash program 90 seconds
- Soft start wash pump
- Automatic self-cleaning cycle
- Shut-off at the end of drain cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- 4 x 150mm legs (included)
- 15 Amp plug with 2 metre lead
- 24 months parts and labour warranty

INCLUDED ACCESSORIES

- 1 x PB40G01 - 400x400mm flat-bottomed basket
- 1 x WB40D01 - 400x400mm basket. 8 plate Ø315mm
- 1 x PH00501 - Six compartment cutlery basket

OPTIONAL ACCESSORIES

- WB40G01 - 400x400mm flat-bottomed basket
- WB40G02 - 400x400mm basket. Ø90mm max stem-glass


SPG415MAU

EASYLINE FULLY INSULATED UNDERBENCH GLASSWASHER - 15 AMP

400x400 mm basket

TECHNICAL SPECIFICATIONS

Dimensions (mm) (WxDxH)	460x600x710 (approx 855mmH with legs)	Minimum supply pressure (bar)	2.5
Basket (mm)	400x400	Drain pump	Yes
Door clearance (mm)	300	Rinse aid pump	Peristaltic
Type of interface	electronic	Detergent pump	Peristaltic
Door/hood structure	double skinned insulated	Number of programs	5
Supplied water temperature (°C)	From cold to 60°	Special programmes	Total renewal of the water inside the tank
Tank volume (litres)	7		Extra rinse
Filtering system	5 Stage filter		Self-cleaning
Boiler volume (litres)	4	Thermostop	Yes
Wash pump (W)	300	Total power (W)	3,100
Tank temperature (°C)	60°	Electrical connection	Single Phase 15A 230V~/14A/3.2kW/50Hz
Rinse pump	Yes		
Rinse temperature (°C)	85°		
Adjustable temperatures	Yes		
Net weight	43kg		

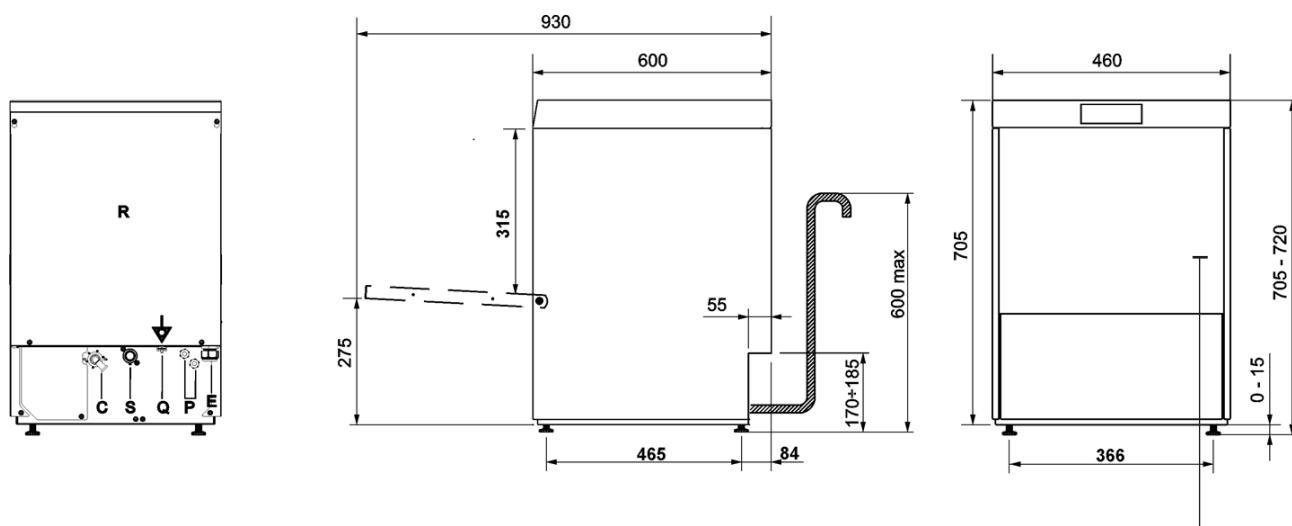

CONNECTION WIRING DIAGRAM KEY

R	LOWER BACK PANEL
C	EXTERNAL DISPENSER POWER SUPPLY CABLE ENTRY POINT
S	DRAIN HOSE
Q	EARTH TERMINAL

P	PERISTALTIC PUMP HOSES
E	ELECTRICITY SUPPLY CABLE
T	FILLER HOSE

*Supplied water temperature >50°C and <60°C and three-phase electrical connection whenever possible.

*Indicative wash times



UNI EN ISO 9001
9130-Smeg

UNI EN ISO 14001
9191-SME2

OHSAS 18001
9192-SME3